



Test Report

Test Report no :	KE 7	Report Issue Date :	09/01/2025	ULR NO :	T F
------------------	------	---------------------	------------	----------	-----

#Customer Party Name :	
#Project / Site Address : :Strengthening & Improvement of Various Roads in Eastern Suburbs	
#Sample Description : SOIL, DOW:	
Test Start Date : 03/01/2025	Test End Date : 09/01/2025
#Sample Id Mark: --	Sample Receipt Date : 02/01/2025
#Size :	#Grade :
#Brand : --	#Consultant Name :
#Client Name :	#Client Reference :
Discipline : MECHANICAL	Group : SOIL AND ROCK
Material/Test Name : Soil	

Sieve Analysis IS 2720 (Part-4): 1985- RA-2020

IS Sieve Size	Percentage of Passing (in %) observed
75 mm	100.00
19 mm	89.62
4.75 mm	72.48
2 mm	58.47
425 mic	33.98
75 mic	13.47

Sr. No	Test Parameter	Unit	Test Result	Limit as per MORT&H	Test Method
1	Liquid Limit	%	37.72	Max 50 %	IS 2720(Part-5) 1985 RA 2020
2	Plastic Limit	%	24.48	--	IS 2720 (PART-5)1985 RA 2020
3	Plasticity Index	%	13.25	Max 25 %	IS 2720 (PART-5)1985 RA 2020
4	Free Swell Index	%	20.00	Max 50%	IS 2720 (Part-40)1977 RA2021






Test Report

Test Report no :		Report Issue Date :	09/01/2025	ULR NO :	T
------------------	--	---------------------	------------	----------	---

DETERMINATION OF WATER CONTENT-DRY
DENSITY RELATION USING HEAVY COMPACTION : Test Method IS 2720 (Part-8) 1983 RA 2020

Determination No.	Weight of Mould + Compacted sample in gm (C)	Weight of compacted sample in gm (D) C-A	Bulk Density of sample in gm/cc (E) D/B	Container No.	Weight of Container in gm (F)	Weight of Container + wet sample in gm (G)	Weight of Container + dry sample in gm (H)	Weight of dry sample in gm (I)	Weight of moisture in gm (J) G-H	% Moisture (K) J/I*100	Dry density in gm/cc (100*E)/(100+K)
1.0	9,145.00	3,814.00	1.70	6	38.69	142.15	138.55	99.86	3.60	3.61	1.64
2.0	9,535.00	4,204.00	1.87	7	43.73	140.20	133.17	89.44	7.03	7.86	1.73
3.0	9,872.00	4,541.00	2.02	8	40.59	138.77	128.38	87.79	10.39	11.84	1.80
4.0	10,200.00	4,869.00	2.16	9	46.33	140.66	128.22	81.89	12.44	15.19	1.88
5.0	9,895.00	4,564.00	2.03	10	46.72	136.95	122.75	76.03	14.20	18.68	1.71

Weight of Mould in gm (A) :	5,331.00	Volume of Mould in cc (B) :	2,250.00
-----------------------------	----------	-----------------------------	----------

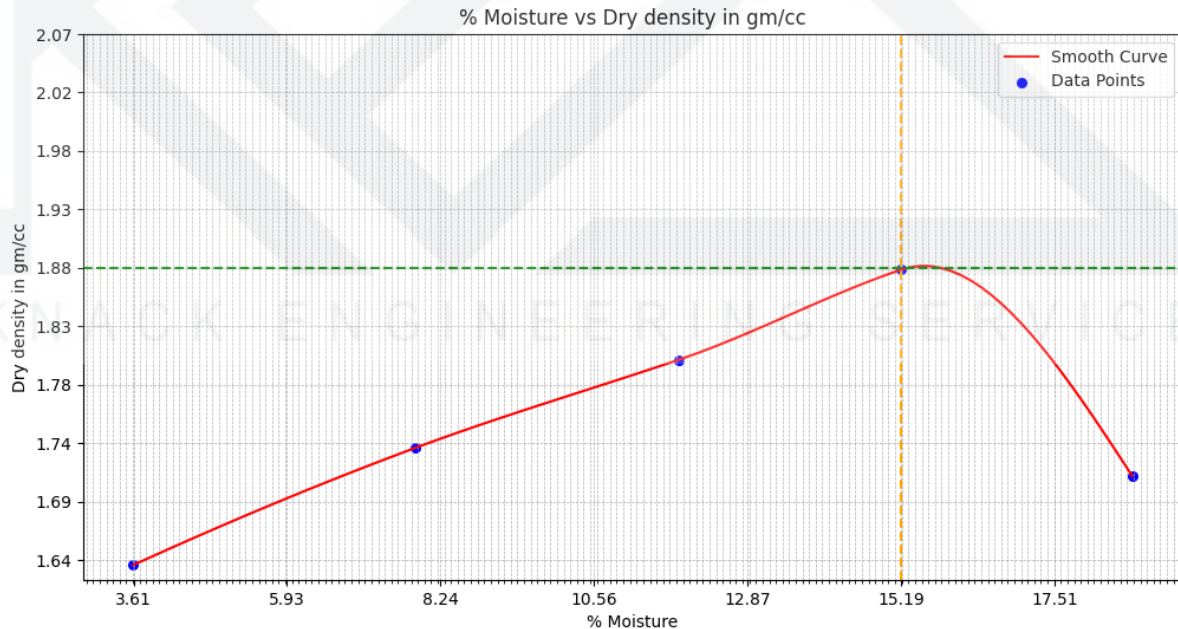

From Graph

MDD :	1.88 gm/cc	OMC :	15.19 %
-------	------------	-------	---------






Test Report

Test Report no :	KES250102187	Report Issue Date :	09/01/2025	ULR NO :	TC682825000000192F
------------------	--------------	---------------------	------------	----------	--------------------

LABORATORY DETERMINATION OF CBR : Test Method : IS 2720 (PART-16) 1987 RA2021
CONDITION SOAKED 1 Div. = 6.96kg

Sr. No	Penetration in mm	Proving Ring Reading	Load in Kg
1	0.00	0.00	0.00
2	0.50	8.00	55.68
3	1.00	16.00	111.36
4	1.50	24.00	167.04
5	2.00	32.00	222.72
6	2.50	36.00	250.56
7	3.00	40.00	278.40
8	4.00	44.00	306.24
9	5.00	48.00	334.08
10	7.50	52.00	361.92
11	10.00	56.00	389.76
12	12.50	60.00	417.60

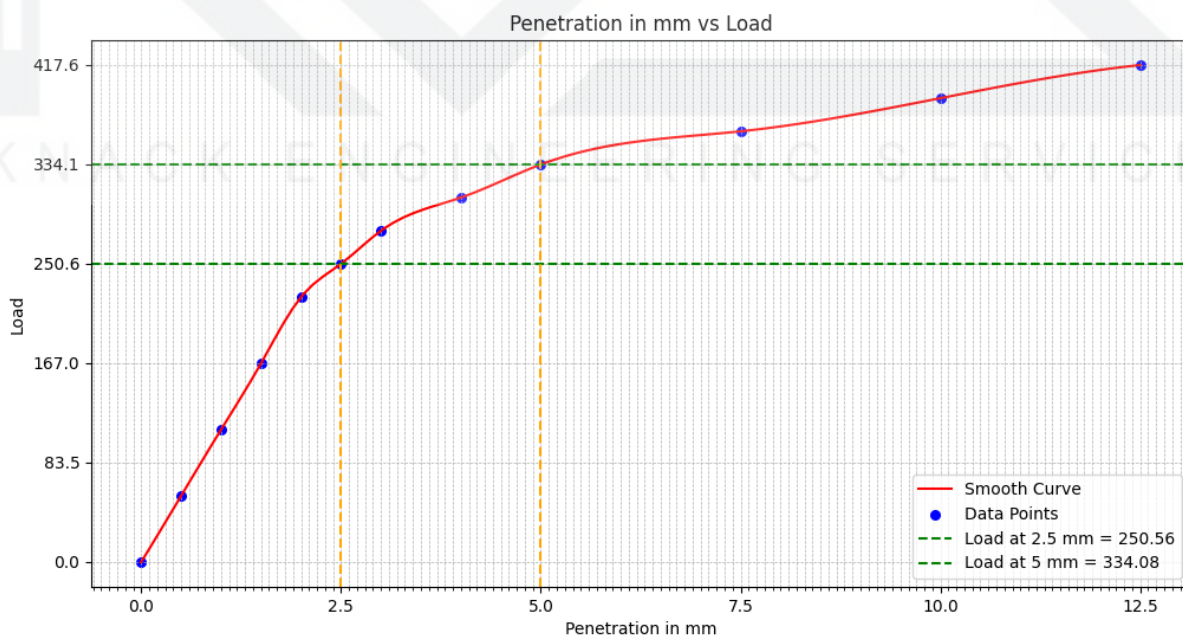

CBR From Graph





Test Report

Test Report no :	7	Report Issue Date :	09/01/2025	ULR NO :	F
------------------	---	---------------------	------------	----------	---

CBR at 2.5mm Penetration = (PT/PS) X 100

From Graph PT = 250.56

PS = 1370

CBR = 18.29

CBR at 5mm Penetration = (PT/PS) X 100

From Graph PT = 334.08

PS = 2055

CBR = 16.26

Result: CBR at 2.5 mm Penetration is maximum hence CBR is 18.29

Note :-

- The Test Report(s) is/are valid only to the sample submitted to the laboratory.
- Sample(s) was/were not drawn by laboratory.
- This Report may not be reproduced in except full/ part without the permission of the Lab Head of the Laboratory.
- # - Information provided by the customer.

Checked By

[Redacted]

(Engineer)

Format No. [Redacted]/Soil-01

.....End of Report.....

Approved By

[Redacted]

(Sr. Engineer (Authorized Signatory))

KNACK ENGINEERING SERVICES

Regd. Office: Shop No. 3, Building B1, Wadala Truck Terminal, MMRDA Compound, Antop Hill, Mumbai - 400037, Tel.: +91 22 2401 0040 Chemical Testing

Department : Shramjivan Bldg., B-5, Office No. 109, First Floor, Wadala Truck Terminal, Mumbai - 400037.

Email : sales@knackengineeringservices.com Website : www.knackengineeringservices.com

CIN No.: U45209MH2017PTC291168

